

TO PANEL MOUNTED CONTROL SECTION : SSLK.PCB
 C B A 0 - D G E F + *** = METER SENSITIVITY

EXTERNAL AC IN
 2X15 OR 2X18U

220Vac POWER TRAF0. 2X15 OR 2X18U 4.5VA
 (MAY BE MOUNTED OFF-BOARD)

1k resistors

BYPASS LED

METER LED

10 X 16 BAL. INPUT BAL. OUTPUT MAIN PCB CONTROL PCB


*** = METER SENSITIVITY: 2K=20dB 1K=10dB FULL SCALE AT 1mA METER
 ALL DIODES 1N4148 1 = 100nF POLY

GYRAF AUDIO	
www.gyraf.dk	
Rev no#	9 Date 05-2006
Subject:	
SSL MIXBUS COMPRESSOR CLONE	
CONTROL SECT: SSLK PCB	
Filename:	SSL_PCB
Size 100x160mm	Mount. 93x152mm

REVIEWED SMALLER IF OUTPUT TX IS USED
 REDUCING THRESHOLD SENSITIVITY

By GSSL LED power at 7:42 pm, Aug 05, 2010

THRESHOLD
 -20 TO +20dB

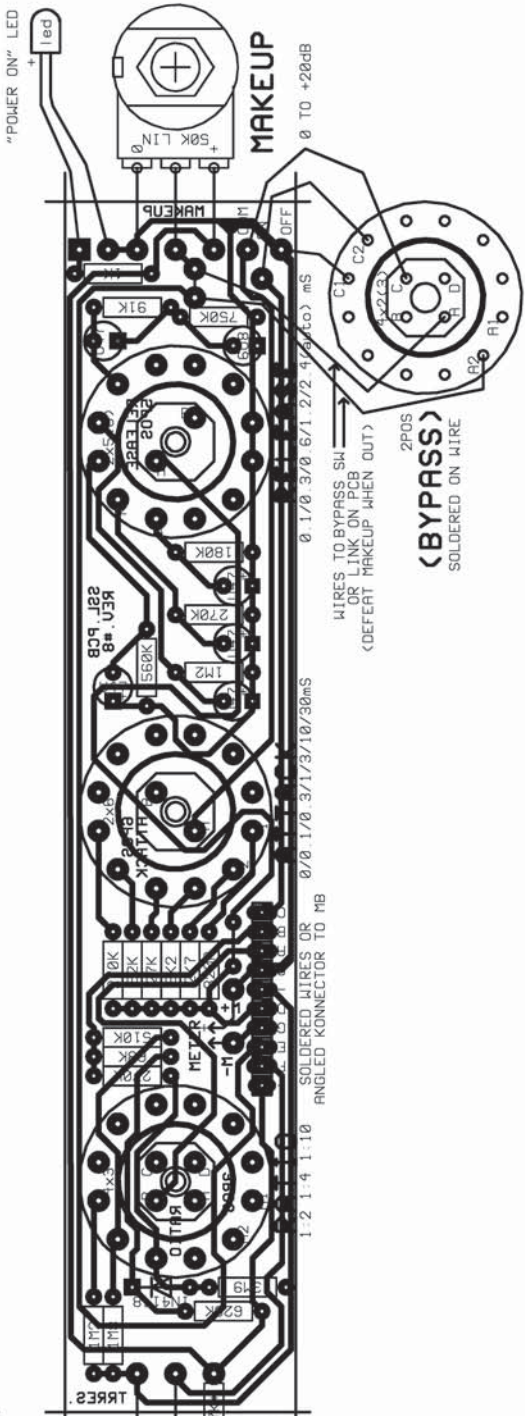

"POWER ON" LED

MAKEUP

Ø TO +20dB

Wires TO BYPASS SW
 OR LINK ON PCB
 (DEFER MAKEUP WHEN OUT)

(BYPASS)
 SOLDERED ON WIRE

0.1/0.3/0.6/1.2/2.4/4.7/10/20/30ms
 0/0.1/0.3/1/3/10/30ms

THRESHOLD
 -20 TO +20dB